




SERIES KL07

- 5 Disk Tumblers Double Bitted Keys
- Max 50 Key Codes



CHARACTERISTICS

- 5 Disk Tumbler cylinder, Double bitted Keys
- 3 to 5 Indexing Positions
- 45°, 90°, Mixed 45° and 90° Detent Angles
- Single pole or Double pole Switching
- Max 50 Key Codes


SPECIFICATIONS

- Contact Rating:** 4A @ 125 VAC or 28 VDC - 2A @ 250 VAC
- Contact Resistance:** <10 Ω
- Insulation Resistance:** 1000 Ω min.
- Dielectric Strength:** 1000 V RMS Min @ sea level
- Electric Life:** 6.000 make & break cycles @ full load

MATERIALS

- Lock Housing:** Zinc alloy Die-casted & Nickel plated
- Cylinder:** 5 Disk tumbler in Zinc alloy Die-casted & Nickel plated
- Keys:** Brass or Brass Nickel-plated
- Contacts:** Hard Copper alloy Silver plated
- Mounting Nut:** Zinc alloy Die-casted & Nickel plated

HOW TO ORDER

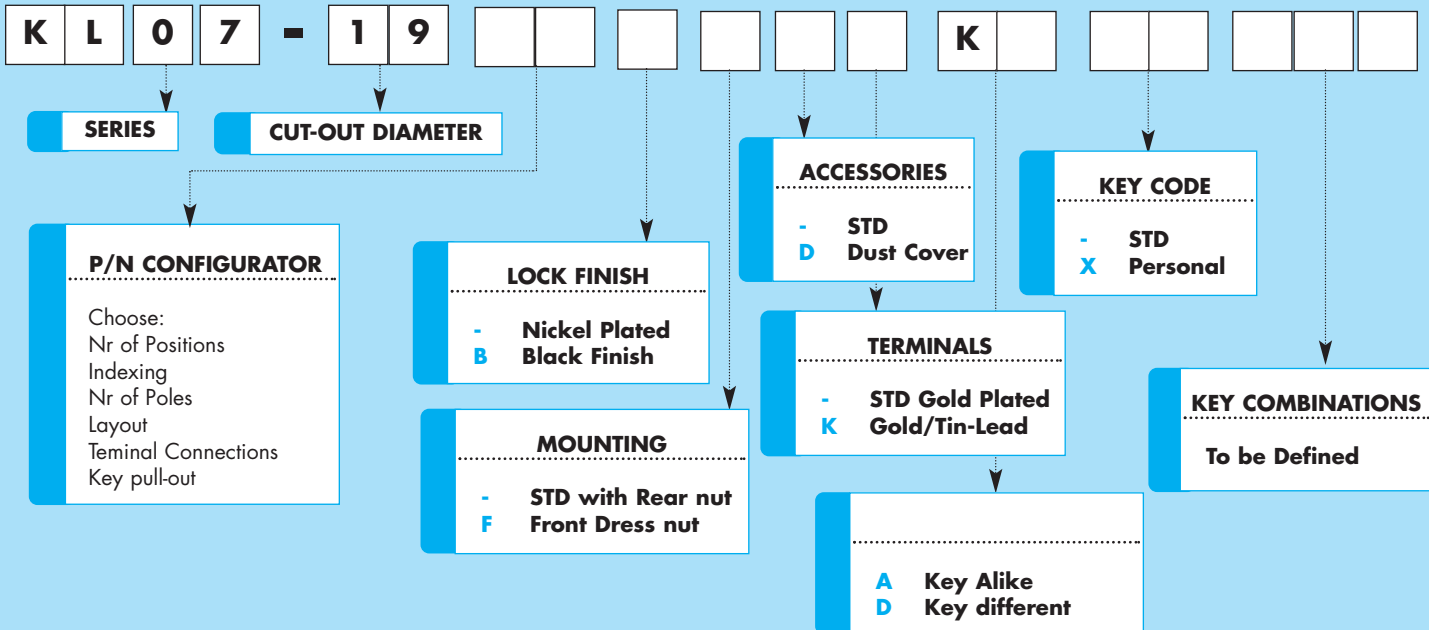

(*) Same Key supplied standard

(*) When ordering specify same Key or different Keys (max as specified in characteristics)

(*) Each Key is identified with a Key Code

(*) Min Qty per lot apply for different Keys - Please enquire -

(*) Repeat orders can be supplied with specific Key Code (subject to min lot orders) - Please enquire -

(*) Key Codes to fit other suppliers lock available on request - Please enquire -