



**SERIES KS TH1**

- **Miniature Key-Lock Switch**
- **200 Key Codes**

**CHARACTERISTICS**

- Tubular Key
- 200 combinations
- 4 Pin Tumbler Mechanism


**SPECIFICATIONS**

**Contact Rating:** 1A @ 125 VAC or 28 VDC - 0,5A @ 250 VAC  
**Contact Resistance:** <10 m Ω  
**Insulation Resistance:** 10° Ω min.  
**Dielectric Strength:** 1000 V RMS Min @ sea level  
**Electric Life:** 6.000 make & break cycles @ full load

**MATERIALS**

**Lock Housing:** Zinc alloy Die-cast  
**Cylinder:** 4 Disk tumbler in Zinc alloy tubular keys, chrome plated  
**Keys:** Zinc alloy, chrome plated  
**Contacts:** Silver plated  
**Terminals:** Silver plated

**HOW TO ORDER**

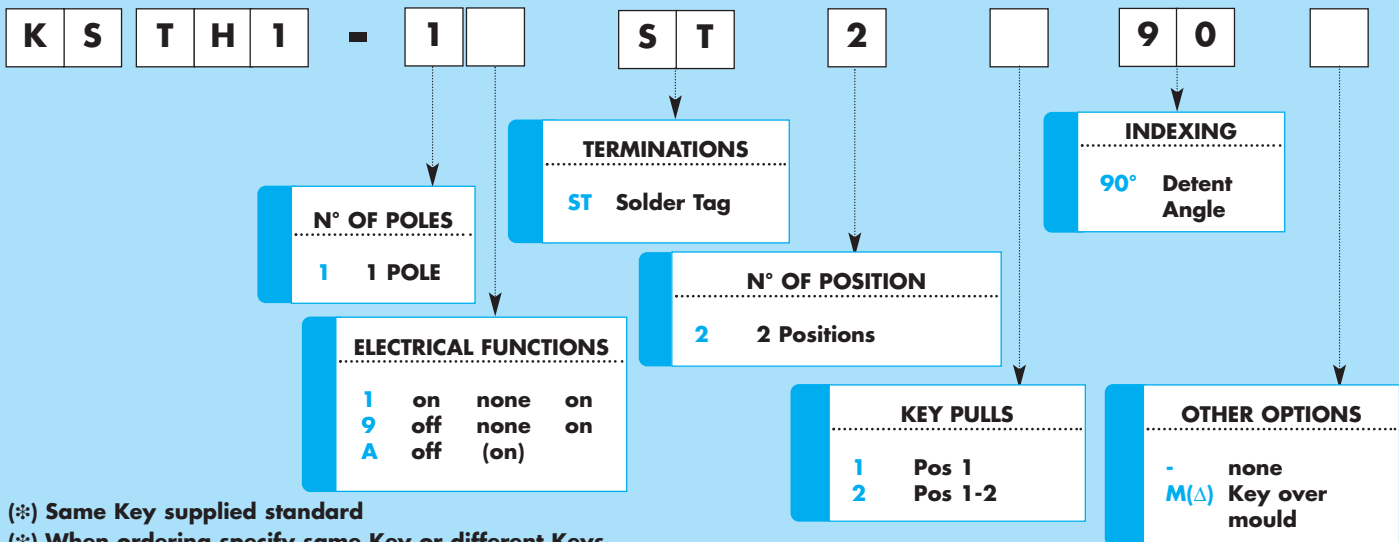

(\*) Same Key supplied standard  
 (\*) When ordering specify same Key or different Keys  
 Min Qty per lot apply for different Keys - Please enquire -

(Δ) Min qty required

**Over - Mould option**

MODELS AVAILABLE	SYMBOL	KEY PULL
KS TH1-19ST2190		Pos 1
KS TH1-19ST2290		Pos 1-2
KS TH1-11ST2190		Pos 1
KS TH1-11ST2290		Pos 1-2
KS TH1-1AST2190		Pos 1

**LEGEND**

- off
- on
- △ mom
- no key pull
- key pull

(ON-ON)

(OFF-ON)

KEY-LOCK SWITCHES